


Permaflex[®] - 18


18%漫反射涂料

耐用性漫反射涂料

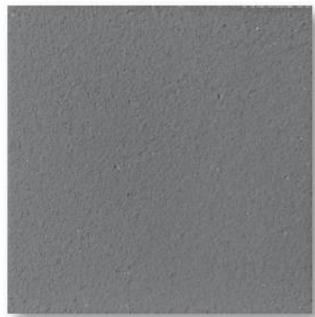

- 耐用性
- 重现性
- 通用性
- 漫反射性
- 高朗伯性
- 重复性

典型的 8/H 漫反射板反射因子

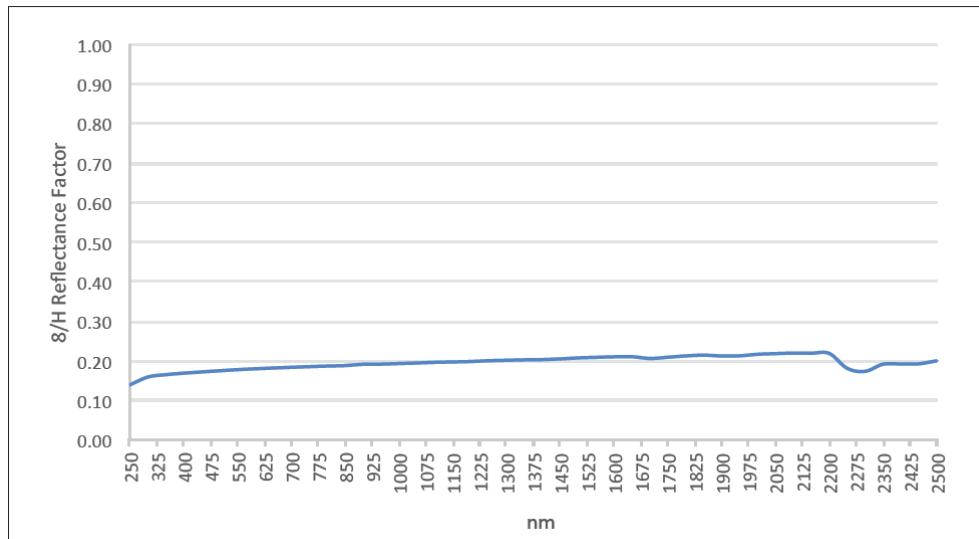

波长

典型的 8/H 漫反射板反射因子

| (nm) | 5% | 10% | 18% | 50% | 80% | 94% |
|------|------|------|------|------|------|------|
| 250 | 0.05 | 0.10 | 0.13 | 0.30 | 0.33 | 0.64 |
| 300 | 0.05 | 0.10 | 0.15 | 0.43 | 0.60 | 0.85 |
| 350 | 0.05 | 0.10 | 0.16 | 0.46 | 0.72 | 0.91 |
| 400 | 0.05 | 0.10 | 0.16 | 0.48 | 0.77 | 0.93 |
| 450 | 0.05 | 0.10 | 0.17 | 0.48 | 0.79 | 0.94 |
| 500 | 0.05 | 0.10 | 0.17 | 0.49 | 0.79 | 0.94 |
| 550 | 0.05 | 0.10 | 0.17 | 0.49 | 0.79 | 0.94 |
| 600 | 0.05 | 0.10 | 0.18 | 0.50 | 0.80 | 0.94 |
| 650 | 0.05 | 0.10 | 0.18 | 0.50 | 0.80 | 0.93 |
| 700 | 0.04 | 0.10 | 0.18 | 0.50 | 0.80 | 0.93 |
| 750 | 0.04 | 0.10 | 0.18 | 0.50 | 0.79 | 0.93 |
| 800 | 0.04 | 0.10 | 0.18 | 0.51 | 0.79 | 0.93 |
| 850 | 0.04 | 0.10 | 0.18 | 0.51 | 0.79 | 0.93 |
| 900 | 0.04 | 0.10 | 0.19 | 0.51 | 0.79 | 0.92 |
| 950 | 0.04 | 0.10 | 0.19 | 0.51 | 0.79 | 0.92 |
| 1000 | 0.04 | 0.10 | 0.19 | 0.52 | 0.79 | 0.92 |
| 1050 | 0.04 | 0.10 | 0.19 | 0.52 | 0.79 | 0.92 |
| 1100 | 0.04 | 0.10 | 0.19 | 0.52 | 0.79 | 0.92 |
| 1150 | 0.04 | 0.10 | 0.19 | 0.52 | 0.77 | 0.91 |
| 1200 | 0.04 | 0.10 | 0.19 | 0.52 | 0.77 | 0.90 |
| 1250 | 0.05 | 0.10 | 0.20 | 0.53 | 0.78 | 0.91 |
| 1300 | 0.05 | 0.10 | 0.20 | 0.53 | 0.78 | 0.91 |
| 1350 | 0.05 | 0.10 | 0.20 | 0.53 | 0.77 | 0.90 |
| 1400 | 0.05 | 0.10 | 0.20 | 0.52 | 0.74 | 0.88 |
| 1450 | 0.05 | 0.11 | 0.20 | 0.53 | 0.74 | 0.88 |
| 1500 | 0.05 | 0.11 | 0.20 | 0.53 | 0.76 | 0.89 |
| 1550 | 0.05 | 0.11 | 0.20 | 0.54 | 0.77 | 0.90 |
| 1600 | 0.05 | 0.11 | 0.21 | 0.54 | 0.77 | 0.89 |
| 1650 | 0.05 | 0.11 | 0.21 | 0.53 | 0.75 | 0.88 |
| 1700 | 0.05 | 0.11 | 0.20 | 0.50 | 0.62 | 0.82 |
| 1750 | 0.05 | 0.11 | 0.20 | 0.51 | 0.65 | 0.83 |
| 1800 | 0.05 | 0.11 | 0.21 | 0.53 | 0.70 | 0.85 |
| 1850 | 0.05 | 0.11 | 0.21 | 0.53 | 0.72 | 0.86 |
| 1900 | 0.05 | 0.11 | 0.21 | 0.51 | 0.67 | 0.82 |
| 1950 | 0.05 | 0.11 | 0.21 | 0.51 | 0.64 | 0.80 |
| 2000 | 0.05 | 0.12 | 0.21 | 0.53 | 0.68 | 0.83 |
| 2050 | 0.05 | 0.12 | 0.21 | 0.53 | 0.69 | 0.84 |
| 2100 | 0.05 | 0.12 | 0.22 | 0.53 | 0.67 | 0.83 |
| 2150 | 0.05 | 0.12 | 0.21 | 0.51 | 0.62 | 0.81 |
| 2200 | 0.05 | 0.12 | 0.21 | 0.51 | 0.62 | 0.81 |
| 2250 | 0.05 | 0.11 | 0.18 | 0.35 | 0.34 | 0.63 |
| 2300 | 0.04 | 0.10 | 0.17 | 0.33 | 0.31 | 0.60 |
| 2350 | 0.05 | 0.11 | 0.19 | 0.38 | 0.38 | 0.65 |
| 2400 | 0.04 | 0.11 | 0.19 | 0.37 | 0.36 | 0.64 |
| 2450 | 0.05 | 0.11 | 0.19 | 0.37 | 0.37 | 0.65 |
| 2500 | 0.05 | 0.12 | 0.20 | 0.42 | 0.44 | 0.69 |



Advancing the Technology of Light: Measure. Create. Reflect.

Tel: 021-61519015
 Email: chinasales@labsphere.com
www.labsphere.com.cn/www.labsphere.com

© 2021 Labsphere, Inc. All Rights Reserved
 PB-13071-000 Rev 02



Advancing the Technology of Light: Measure. Create. Reflect.

Tel: 021-61519015
Email: chinasaless@labsphere.com
www.labsphere.com.cn/www.labsphere.com

© 2021 Labsphere, Inc. All Rights Reserved
PB-13071-000 Rev 02